


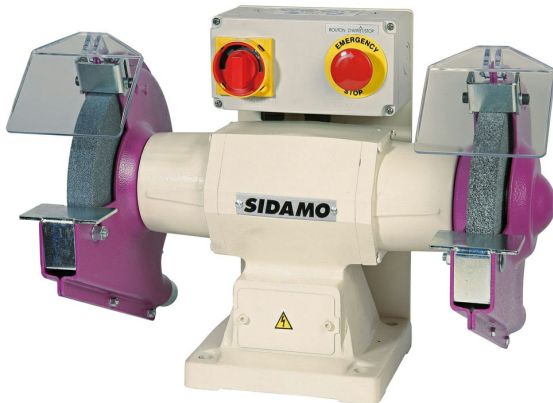

**132**

(Ref. 20113003)

Dry grinding of ferrous metals

**Usage très intensif**

Guarantee:  

Photo et textes non contractuels

## Product Information:

"Cast aluminium body  
Fitted with self-lubricated oiltight bearings  
Control box complying with high school and administration requirements  
4-point locking Start/Stop switch  
Lack of voltage-coil safety device  
Emergency Stop with mushroom stay put button  
Polycarbonate protective shield  
Motor internal automatic heat protection  
Pressed metal sheet carters fitted with a nozzle to collect dust  
Adjustable anti-spark shield and tool-holders 2 mm away from the wheel  
Hot weather adaptation on request

## Technical characteristics:

Height (cm) : 37.00  
Width (cm) : 33.00  
Length (cm) : 50.00  
Net weight (Kg) : 18.00  
Power(kW) 0.75  
Power (V) 1-phase 230V  
Rotation speed 1 (rpm) 2 800  
Wheel-1 dimension (mm) 200 x 25 x 20  
Wheel-1 grain A 24 R / A 60 M  
Diameter (mm)